



Protect-Fast™ TELCOM Braided Sleeving

Protect-Fast™ TELCOM Braided Sleeving is an efficient solution allowing for easy installation of wires or bundles of cable. It is a tough, lightweight method used to contain and protect cable assemblies, hoses and wire harnesses from abrasion and cutting.

- The PV0 material is UL94 V-0 approved, chemical resistant, and has a temperature rating from -70°C to 260°C (-94°F to 500°F)
- The PFW material is UL VW-1 approved, resistant to solvents and chemicals, and has a temperature rating from -75°C to 125°C (-103°F to 257°F)

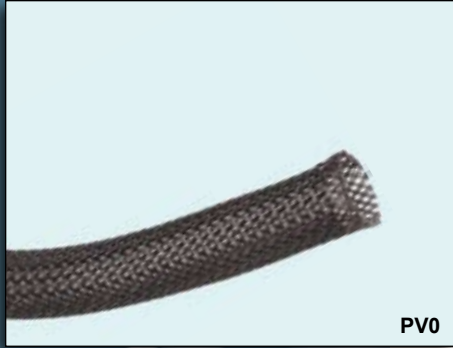

PV0

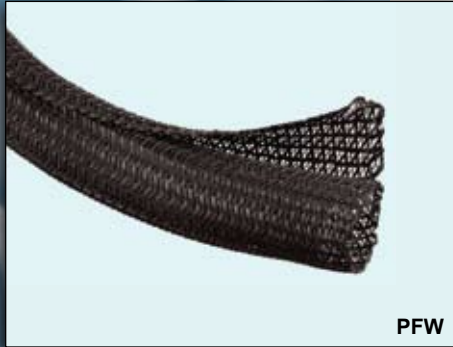

PFW



PF1

Features and Benefits:

Feature	PV0	PFW
Material	Polyetheretherketone	Polyethylene Terephthalate
Monofilament Diameter	0.010"	0.008" - 0.015"
Wall Thickness	0.025"	Variable
Flammability Rating	UL94 V-0	UL VW-1
Expansion	150% Sleeve	25% overlap Wrap
Operating Temperature Range	-70°C to 260°C (-94°F to 500°F)	-75°C to 125°C (-103°F to 257°F)
Melt Temperature	340°C (644°F)	250°C (482°F)
Corrosion Resistance	High Chemical Resistance	Solvents Chemicals
Abrasion Resistance	High	
Recommended Cutting	Hot Knife	
Outgassing	Low	Medium
Available Colors	Black	Black w/ White Tracer



www.devicetech.com

The information contained in this data sheet is based on our experience to date and is believed to be reliable. It is intended as a guide for use by persons having technical skill at their discretion and risk. We do not guarantee favorable results or assume any liability in connection with its use. Dimensions contained herein are for reference purposes only. For specific dimensional requirements, consult the factory. This publication is not to be taken as license to operate under, or a recommendation to infringe upon any existing patents. This supersedes and voids all previous literature, etc. Device Technologies, Inc. expressly disclaims any and all express or implied warranties concerning its products including without limitation, warranty of fitness for a particular purpose and warranty of merchantability.


PFT-0609/2M

Protect-Fast™ TELCOM Product Options

Protect-Fast™ PV0 Braided Sleeving


DTi Part No.	Nominal Size	Expansion Range	Bulk Roll Sizes	Mini Roll Sizes	Available Colors
PFT-PV0-0	1/8"	3/32" - 1/4"	1000'	225'	Black
PFT-PV0-1	1/4"	1/8" - 7/16"	1000'	200'	
PFT-PV0-2	3/8"	3/16" - 5/8"	500'	125'	
PFT-PV0-3	1/2"	1/4" - 3/4"	500'	100'	
PFT-PV0-4	3/4"	1/2" - 1 1/4"	250'	75'	
PFT-PV0-6	1 1/4"	3/4" - 1 3/4"	250'	50'	
PFT-PV0-8	1 3/4"	1 1/4" - 2 3/4"	200'	30'	
PFT-PV0-10	2 1/2"	1 3/4" - 4 1/2"	200'	30'	

Order Examples

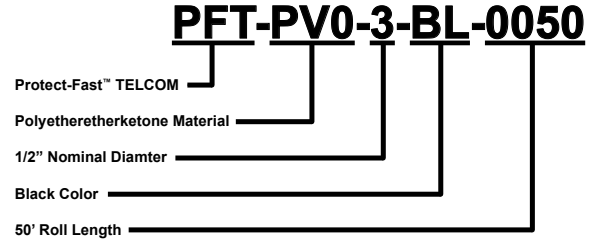

Protect-Fast™ PFW Braided Wrap

DTi Part No.	Nominal Size	Expansion Range	Bulk Roll Sizes	Mini Roll Sizes	Available Colors
PFT-PFW-0	1/8"	-	400'	100'	Black with White Tracer
PFT-PFW-1	1/4"	-	200'	100'	
PFT-PFW-3	1/2"	-	150'	75'	
PFT-PFW-4	3/4"	-	100'	50'	
PFT-PFW-5	1"	-	100'	50'	
PFT-PFW-7	1 1/2"	-	75'	25'	
PFT-PFW-9	2"	-	50'	25'	

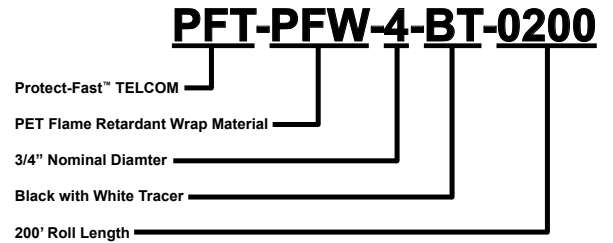

PF Braided Sleeving Installation Tool

DTi Part No.	PF14	PF12	PF34	PF1	PF112
Sleeve Size	1/4"	1/2"	3/4"	1"	1 1/2"

I.S. EN ISO 9001:2008 • AS9100-B/ISO 9001:2008 Certified. Registration No. AS19.4480
 Certified Vendor to Fortune 100 & 500 OEMs, JIT w/ MAJOR OEMs Worldwide, supported by International Distribution



USA Toll Free: +1-800-669-9682
 Phone: +1-508-229-2000 x 130
 Fax: +1-508-229-2622
 Email: customerservice@devicetech.com



The information contained in this data sheet is based on our experience to date and is believed to be reliable. It is intended as a guide for use by persons having technical skill at their discretion and risk. We do not guarantee favorable results or assume any liability in connection with its use. Dimensions contained herein are for reference purposes only. For specific dimensional requirements, consult the factory. This publication is not to be taken as license to operate under, or a recommendation to infringe upon any existing patents. This supersedes and voids all previous literature, etc. Device Technologies, Inc. expressly disclaims any and all express or implied warranties concerning its products including without limitation, warranty of fitness for a particular purpose and warranty of merchantability.